

Operation Guide 3518

ENGLISH

You can also find information about operational procedures at the CASIO website.

<https://support.casio.com/global/en/wat/model/3518/>



EN-1

Warning!

- When fishing, always take proper precautions to ensure your own personal safety and the personal safety of others around you.
- Note that the fishing level indicator and moon phase indicator are all based on calculated values. They are provided only for reference purposes.

About This Manual



- Button operations are indicated using the letters shown in the illustration.
- Note that the product illustrations in this manual are intended for reference only, and so the actual product may appear somewhat different than depicted by an illustration.
- Each section of this manual provides you with the information you need to perform operations in each mode. Further details and technical information can be found in the "Reference" section.

EN-2

EN-3

Contents

About This Manual EN-3

Watch Features EN-7

Selecting a Mode EN-8

Timekeeping EN-10

To set the time and date EN-11

To toggle the Timekeeping Mode time between DST and Standard Time EN-14

To configure Home Site data EN-16

To toggle between 12-hour and 24-hour timekeeping EN-18

Fishing/Moon Mode EN-19

To view the current fishing level and Moon data EN-21

To specify a date EN-23

Stopwatch EN-25

To measure times with the stopwatch EN-26

Timer EN-27

To use the timer EN-28

To set up the timer EN-29

Alarm EN-31

To set an alarm time EN-33

To test the alarm EN-36

To turn Alarms 2 and 3, and the Hourly Time Signal on and off EN-36

To select the operation of Alarm 1 EN-38

Dual Time EN-39

To set the Dual Time EN-40

EN-4

EN-5

Illumination EN-42

To illuminate the display EN-42

To specify the illumination duration EN-43

Reference EN-44

To turn the button operation tone on and off EN-46

Specifications EN-49

Watch Features

- ◆ **Fishing/Moon Data**
The Fishing/Moon Mode displays the suitability of a specific date and time for fishing. This mode also can be used to display Moon age and Moon phase for a specific date.
- ◆ **Stopwatch**
- ◆ **Timer**
- ◆ **Alarm**
- ◆ **Dual Time**

You can also find information about operational procedures at the CASIO website.




<https://support.casio.com/global/en/wat/model/3518/>

EN-6

EN-7

Selecting a Mode

- Press (C) to change from mode to mode.
- In any mode (except when a setting screen is on the display), press (B) to illuminate the face of the watch.

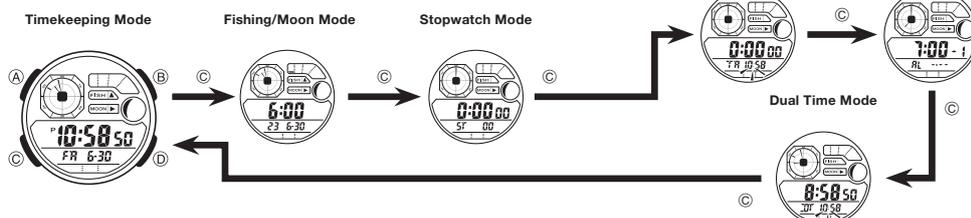

EN-8


You can also find information about operational procedures at the CASIO website.



<https://support.casio.com/global/en/wat/model/3518/>

EN-9

Timekeeping



Use the Timekeeping Mode to set and view the current time and date.

- The Moon phase indicator (page EN-44) shows the current Moon phase in accordance with the current date as kept in the Timekeeping Mode.
- The fishing level indicator (page EN-20) indicates the times when fish can be expected to be feeding. For more information, see "Fishing/Moon Mode".

Important!


- Be sure to configure the current time and date, and your Home Site data (data for the site where you use the watch) correctly before using the functions of this watch. See "Home Site Data" (page EN-15) for more information.

EN-10

To set the time and date



1. In the Timekeeping Mode, hold down (A) until the second starts to flash, which indicates the setting screen.
2. Press (C) to move the flashing in the sequence shown below to select the other settings.



EN-11

3. When the setting you want to change is flashing, use (B) and (D) to change it as described below.

Screen	To do this:	Do this:
50	Reset the second to 00	Press (D).
0F DST	Toggle between Daylight Saving Time (On) and Standard Time (OF)	Press (D).
10:58	Change the hour or minute	Use (B) (-) and (D) (+).
20 23	Change the year	
6:30	Change the month or day	

EN-12

4. Press (A) twice to exit the setting screen.

- The first press of (A) displays the UTC differential setting screen. Pressing (A) again exits the setting screen.
- See "Daylight Saving Time (DST) Setting" below for details about the DST setting.
- The day of the week is displayed automatically in accordance with the date (year, month, and day) settings.

Daylight Saving Time (DST) Setting

Daylight Saving Time (summer time) advances the time setting by one hour from Standard Time. Remember that not all countries or even local areas use Daylight Saving Time.

EN-13

To toggle the Timekeeping Mode time between DST and Standard Time



1. In the Timekeeping Mode, hold down (A) until the seconds start to flash, which indicates the setting screen.
2. Press (C) once to display the DST setting screen.
3. Press (D) to toggle between Daylight Saving Time (On displayed) and Standard Time (OF displayed).
4. Press (A) twice to exit the setting screen.
 - The DST indicator appears on the Timekeeping, Fishing/Moon, and Alarm Mode screens to indicate that Daylight Saving Time is turned on. In the case of the Fishing/Moon Mode, the DST indicator appears on the fishing level screen only.

EN-14

Home Site Data

Moon phase, the fishing level indicator, and Fishing/Moon Mode data will not be displayed properly unless Home Site data (UTC differential, and longitude) is configured correctly.

- The UTC differential is a value that indicates the time difference between a reference point in Greenwich, England and the time zone where a city is located.
- The letters "UTC" is the abbreviation for "Coordinated Universal Time", which is the world-wide scientific standard of timekeeping. It is based upon carefully maintained atomic (cesium) clocks that keep time accurately to within microseconds. Leap seconds are added or subtracted as necessary to keep UTC in sync with the Earth's rotation.
- The "Site Data List" at the back of this manual provides UTC differential and longitude information around the world.
- The following is the initial factory default Home Site data (Tokyo, Japan) when you first purchase the watch, and whenever you have the battery replaced. Change these settings to match the area where you normally use the watch.
UTC differential (+9.0); Longitude (East 140 degrees)

EN-15

To configure Home Site data



1. In the Timekeeping Mode, hold down (A) until the second starts to flash, which indicates the setting screen.
2. Press (A) again to display the UTC differential setting screen.
3. Press (C) to move the flashing in the sequence shown below to select other settings.



EN-16

4. When the setting you want to change is flashing, use (B) and (D) to change it as described below.

Setting	Screen	Button Operations
UTC Differential	+ 9.0 UTC	Use (B) (-) and (D) (+) to change the setting. • You can specify a value in the range of -12.0 to +14.0, in 0.5-hour units.
Longitude Value	140° E	Use (B) (-) and (D) (+) to change the setting. • You can specify a value in the range of 0° to 180°, in 1-degree units.
East Longitude/ West Longitude	E	Use (D) to switch between east longitude (E) and west longitude (W).

- When the DST setting is on, the UTC differential can be set in a range of -11.0 to +15.0 in 0.5-hour units.

5. Press (A) to exit the setting screen.

EN-17


To toggle between 12-hour and 24-hour timekeeping

In the Timekeeping Mode, press (D) to toggle between 12-hour timekeeping and 24-hour timekeeping.

- With the 12-hour format, the P (PM) indicator appears to the left of the hour digits for times in the range of noon to 11:59 p.m. and the A (AM) indicator appears to the left of the hour digits for times in the range of midnight to 11:59 a.m.
- With the 24-hour format, times are displayed in the range of 0:00 to 23:59, without any indicator.
- The 12-hour/24-hour timekeeping format you select in the Timekeeping Mode is applied in all other modes.
- The A and P indicators are not displayed with the Timekeeping Mode time on the Timer Display and Dual Time Mode screens.

EN-18

Fishing/Moon Mode



The Fishing/Moon Mode displays an indicator that shows, as one of five levels, the suitability of a specific date and time (minute 00 to minute 59 of a particular hour) for fishing. This mode also can be used to display Moon Data (Moon age and Moon phase) for a specific date.

- If you doubt that the fishing level indicator or current Moon data is wrong for some reason, check the current Timekeeping Mode settings (time, date, and Home Site), and correct them if required.
- See "Moon Phase Indicator" for information about the Moon phase indicator.
- All of the operations in this section are performed in the Fishing/Moon Mode, which you enter by pressing (C).

EN-19

Fishing Level Indicator

The fishing level indicator shows the relative favorability of a fishing time (calculated in accordance with Moon transit and phase) as shown in the table below.


Level 5	Level 4	Level 3	Level 2	Level 1
Moon Phase	Moon Transit	Upper Lower	West East	Other
New moon*				
Full moon		Level 5	Level 4	Level 3
First quarter		Level 4	Level 3	Level 2
Last quarter		Level 4	Level 3	Level 2
Other		Level 3	Level 2	Level 1

* These indicators actually appear during Moon ages 13.0 to 16.6 (Full Moon and phase immediately preceding it) and 27.7 to 1.8 (New Moon and phase immediately preceding it).

• The fishing level indicator changes in accordance with the Moon data.

EN-20

EN-21

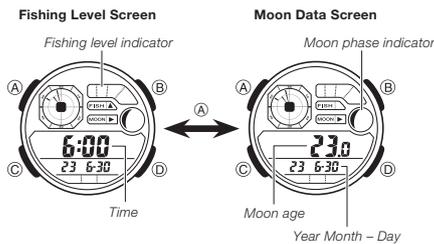

- While the fishing level screen is displayed, press (D) to advance to the next hour.
- While the Moon Data screen is displayed, press (D) to advance to the next day.

EN-22

- In the Timekeeping Mode, the fishing level indicator flashes whenever the fishing level of the current time is 4 or 5.


To view the current fishing level and Moon data

In the Fishing/Moon Mode, press (A) to toggle between the fishing level screen and the Moon Data screen.


- The fishing level indicator shows the level for the displayed time. The initial fishing level screen shows the level for 6:00 a.m. The Moon data screen shows the Moon age and Moon phase for the current date.

- You can also specify a particular date (year, month, day) to view its fishing level and Moon data. See "To specify a date" for more information.
- When you enter the Fishing/Moon Mode, the screen (fishing level or Moon data) that was displayed the last time you exited the mode appears first.

To specify a date

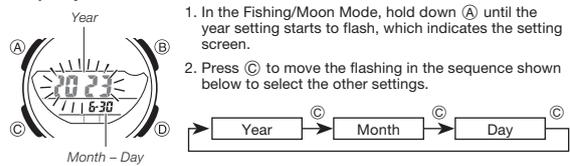

1. In the Fishing/Moon Mode, hold down (A) until the year setting starts to flash, which indicates the setting screen.
2. Press (C) to move the flashing in the sequence shown below to select the other settings.



3. While a setting is flashing, use (B) (-) or (D) (+) to change it.
 - You can specify a date in the range of January 1, 2000 to December 31, 2099.
4. Press (A) to exit the setting screen.
5. Use (A) to display either the fishing level screen or the Moon Data screen.

EN-24

EN-23

Stopwatch



The stopwatch lets you measure elapsed time, split times, and two finishes.

- The display range of the stopwatch is 23 hours, 59 minutes, 59.99 seconds.
- The stopwatch continues to run, restarting from zero after it reaches its limit, until you stop it.
- An ongoing elapsed time measurement operation will continue internally even if you change to another mode. However, if you exit the Stopwatch Mode while a split time is displayed, the split time will not be displayed when you return to the Stopwatch Mode.
- All of the operations in this section are performed in the Stopwatch Mode, which you enter by pressing (C) (page EN-8).

To measure times with the stopwatch

Elapsed Time



Split Time



Two Finishes



EN-26

EN-27

Timer



You can set the countdown timer within a range of one minute to 24 hours. An alarm sounds when the countdown reaches zero.

- You can also select auto-repeat, which automatically restarts the countdown from the original value you set whenever zero is reached.
- All of the operations in this section are performed in the Timer Mode, which you can enter using (C) (page EN-9).

To use the timer

Press (D) while in the Timer Mode to start the countdown timer.

- When the end of the countdown is reached and auto-repeat is turned off, the alarm sounds for 10 seconds or until you stop it by pressing any button. The countdown time is automatically reset to its starting value after the alarm stops.
- When auto-repeat is turned on, the countdown will restart automatically without pausing when it reaches zero. The alarm sounds in order to signal when the countdown reaches zero.
- The countdown timer measurement operation continues even if you exit the Timer Mode.
- Press (D) while a countdown operation is in progress to pause it. Press (D) again to resume the countdown.
- To completely stop a countdown operation, first pause it (by pressing (D)), and then press (A). This returns the countdown time to its starting value.

EN-28

To set up the timer



1. While the countdown start time is on the display in the Timer Mode, hold down (A) until the hour setting of the countdown start time starts to flash, which indicates the setting screen.

• If the countdown start time is not displayed, use the procedure under "To use the timer" to display it.

2. Press (C) to move the flashing in the sequence shown below to select other settings.



EN-29

3. While a setting is flashing, use **(B)** and **(D)** to change it as described below.

Screen	To do this:	Do this:
0:00	Change the hours or minutes	Use (B) (-) and (D) (+).
ON OFF	Toggle auto-repeat on (ON) and off (OFF)	Press (D) .

- To specify a countdown start time of 24 hours, set **0:00**.
4. Press **(A)** to exit the setting screen.
- The auto-repeat on indicator (**ON**) is displayed on the Timer Mode screen while this function is turned on.
 - Frequent use of auto-repeat and the alarm can run down battery power.

EN-30

EN-31

Alarm



You can set up to three independent multi-function alarms with hour, minutes, month, and day. When an alarm is turned on, the alarm tone sounds when the alarm time is reached. One of the alarms has a snooze feature. You can also turn on an Hourly Time Signal that causes the watch to beep every hour on the hour.

- There are three alarms numbered **1** through **3**. The Hourly Time Signal screen is indicated by **:00**.
- All of the operations in this section are performed in the Alarm Mode, which you enter by pressing **(C)** (page EN-9).

Alarm Types

The alarm type is determined by the settings you make, as described below.

- Daily alarm**
Set the hour and minutes for the alarm time. This type of setting causes the alarm to sound everyday at the time you set.
- Date alarm**
Set the month, day, hour and minutes for the alarm time. This type of setting causes the alarm to sound at the specific time, on the specific date you set.
- 1-Month alarm**
Set the month, hour and minutes for the alarm time. This type of setting causes the alarm to sound everyday at time you set, only during the month you set.
- Monthly alarm**
Set the day, hour and minutes for the alarm time. This type of setting causes the alarm to sound every month at the time you set, on the day you set.


EN-32

EN-33

To set an alarm time



1. In the Alarm Mode, use **(D)** to scroll through the alarm screens until the one whose time you want to set is displayed.




- Alarm **1** has a snooze feature.
- The snooze alarm operation repeats every five minutes.

2. After you select an alarm, hold down **(A)** until the hour setting of the alarm time starts to flash, which indicates the setting screen.

- This operation automatically turns on the alarm.

3. Press **(C)** to move the flashing in the sequence shown below to select other settings.



4. While a setting is flashing, use **(B)** (-) and **(D)** (+) to change it.
- To set an alarm that does not include a month (daily alarm, monthly alarm), set - for the month. Use **(B)** and **(D)** until the - mark appears (between 12 and 1) while month setting is flashing.
 - To set an alarm that does not include a day (daily alarm, 1-month alarm), set -- for the day. Use **(B)** and **(D)** until the -- mark appears (between the end of the month and 1) while the day setting is flashing.
 - If you are using 12-hour timekeeping, **P** (p.m.) or **A** (a.m.) will be indicated for alarm times.
 - When setting an alarm time using 12-hour timekeeping, take care to set the time correctly as a.m. (**A** indicator) or p.m. (**P** indicator).

EN-34

EN-35

5. Press **(A)** to exit the setting screen.

Alarm Operation

The alarm tone sounds at the preset time for 10 seconds, regardless of the mode the watch is in. While the snooze function is turned on, the alarm operation will repeat every five minutes up to seven times, or until the alarm or snooze function is turned off.


- To stop the alarm tone after it starts to sound, press any button.
 - Performing any one of the operations below during a 5-minute interval between snooze alarms cancels the current snooze alarm operation.
- Displaying the Timekeeping Mode setting screen (page EN-11)
Displaying the alarm 1 setting screen (page EN-33)

To test the alarm

In the Alarm Mode, hold down **(D)** to sound the alarm.

To turn Alarms 2 and 3, and the Hourly Time Signal on and off

- In the Alarm Mode, use **(D)** to select alarm number **2** or **3**, or the Hourly Time Signal.
- Press **(A)** to toggle it on and off.
 - Turning on alarm **2** or **3** displays the alarm on indicator.
 - Turning on the Hourly Time Signal displays the hourly time signal on indicator.
 - The alarm on (**ALM**) indicator and hourly time signal on (**SIG**) indicator are displayed in all modes.



Alarm on indicator



Hourly time signal on indicator

EN-36

EN-37

To select the operation of Alarm 1

- In the Alarm Mode, use **(D)** to select Alarm **1**.
- Press **(A)** to cycle through the available settings in the sequence shown below.



- The applicable alarm on indicator (**SNZ ALM**) is displayed in all modes when an alarm is turned on.
- SNZ** indicator flashes during the 5-minute intervals between alarms.
- Displaying the Alarm **1** setting screen (page EN-33) while the snooze alarm is turned on automatically turns off the snooze feature.

EN-38

Dual Time


The Dual Time Mode lets you keep track of time in a different time zone. You can select Standard Time or Daylight Saving Time for the Dual Time Mode time.

- In the Dual Time Mode, the seconds count is synchronized with the seconds count of the Timekeeping Mode.


EN-39

To set the Dual Time

Dual time (Hour : Minute)



1. Press **C** to enter the Dual Time Mode (page EN-9).
2. In the Dual Time Mode, hold down **A** until the DST setting starts to flash, which indicates the setting screen.
3. Press **C** to move the flashing in the sequence shown below to select the other settings.



4. When the setting you want to change is flashing, use **B** and **D** to change it as described below.

Screen	To do this:	Do this:
0F DST	Toggle between Daylight Saving Time (On) and Standard Time (OF)	Press D .
8:58	Change the hour or minute	Use B (-) and D (+).

- If you are using 12-hour timekeeping, **P** (p.m.) or **A** (a.m.) will be indicated for the time.

5. Press **A** to exit the setting screen.
 - The **DST** indicator on the Dual Time Mode screen indicates that DST is turned on for the Dual Time Mode time.

EN-40

EN-41

■ Illumination

The watch has an LED light that you can turn on for reading in the dark.
 • See "Illumination Precautions" (page EN-48) for more important information.

To illuminate the display

- In any mode, press **B** to turn on illumination.
- You can use the procedure below to select either 1.5 seconds or 3 seconds as the illumination duration. When you press **B**, the illumination will remain on for about 1.5 seconds or 3 seconds, depending on the current illumination duration setting.

To specify the illumination duration



1. In the Timekeeping Mode, hold down **A** until the seconds start to flash, which indicates the setting screen.
2. While the seconds are flashing, press **B** to toggle the illumination duration between 1.5 seconds (-) and 3 seconds (=).
3. Press **A** twice to exit the setting screen.

EN-42

EN-43

■ Reference

This section contains more detailed and technical information about watch operation. It also contains important precautions and notes about the various features and functions of this watch.

Moon Phase Indicator

The Moon phase indicator of this watch indicates the current phase of the Moon as shown below.

	(part you cannot see)			(part you can see)			
Moon Phase Indicator							
Moon Age	0.0-1.8 27.7-29.5	1.9-5.5	5.6-9.2	9.3-12.9	13.0-16.6	16.7-20.2	20.3-23.9 24.0-27.6
Moon Phase	New Moon		First Quarter (Waxing)		Full Moon		Last Quarter (Waning)

EN-44

EN-45

- The Moon phase indicator shows the Moon as viewed at noon from a position in the Northern Hemisphere looking south. Note that at times the image shown by the Moon phase indicator may differ from that of the actual Moon in your area.
- The left-right orientation of the Moon phase is reversed when viewing from the Southern Hemisphere or from a point near the equator.

Moon Phases and Moon Age

The Moon goes through a regular 29.53-day cycle. During each cycle, the Moon appears to wax and wane as the relative positioning of the Earth, Moon, and Sun changes.

Button Operation Tone



The button operation tone sounds any time you press one of the watch's buttons. You can turn the button operation tone on or off as desired.

- Even if you turn off the button operation tone, the alarm, Hourly Time Signal, and Timer Mode alarm all operate normally.

To turn the button operation tone on and off

- In any mode (except when a setting screen is on the display), hold down **C** to toggle the button operation tone on (⌘ not displayed) and off (⌘ displayed).
- Holding down **C** to turn the button operation tone on or off also causes the watch's current mode to change.
- The ⌘ indicator is displayed in all modes when the button operation tone is turned off.

Auto Return Features

- If you leave a screen with flashing digits on the display for two or three minutes without performing any operation, the watch automatically exits the setting screen.
- If you leave the watch in the Fishing/Moon Mode or Alarm Mode for two or three minutes without performing any operation, it automatically changes to the Timekeeping Mode.

Scrolling

The **B** and **D** buttons are used in various modes and setting screens to scroll through data on the display. In most cases, holding down these buttons during a scroll operation scrolls through the data at high speed.

EN-46

EN-47

Timekeeping

- Resetting the seconds to **00** while the current count is in the range of 30 to 59 causes the minutes to be increased by 1. In the range of 00 to 29, the seconds are reset to **00** without changing the minutes.
- The year can be set in the range of 2000 to 2099.
- The watch's built-in full automatic calendar makes allowances for different month lengths and leap years. Once you set the date, there should be no reason to change it except after you have the watch's battery replaced.

Illumination Precautions

- Illumination may be difficult to see when viewed under direct sunlight.
- Illumination turns off automatically whenever an alarm sounds.
- Frequent use of illumination runs down the battery.

Specifications

Accuracy at normal temperature: ±30 seconds a month

Timekeeping: Hour, minute, second, a.m. (A)/p.m. (P), month, day, day of the week

Time format: 12-hour and 24-hour

Calendar system: Full Auto-calendar pre-programmed from the year 2000 to 2099

Other: Daylight Saving Time (summer time)/Standard Time; Home Site data settings (UTC differential, longitude)

Fishing/Moon: Fishing level for a specified date and time; Moon phase indicator and Moon age for a specified date

Stopwatch:

Measuring unit: 1/100 second

Measuring capacity: 23:59:59.99"

Measuring modes: Elapsed time, split time, two finishes

EN-48

EN-49

Operation Guide 3518

CASIO®

Timer:

Measuring unit: 1 second
 Input range: 1 minute to 24 hours (1-minute increments and 1-hour increments)
 Time up alert duration: 10 seconds
 Other: Auto-repeat timing

Alarm: 3 Multi-function* alarms (1 with snooze feature);

Hourly Time Signal
 * Alarm type: Daily alarm, Date alarm, 1-month alarm, Monthly alarm
 Alert duration: 10 seconds

Dual Time: Hour, minute, second, a.m. (A)/p.m. (P)

Other: Daylight Saving Time (summer time)/Standard Time

Illumination: LED (light-emitting diode); selectable illumination duration (approximately 1.5 seconds or 3 seconds)

Other: Button operation tone on/off

Battery:

One lithium battery (Type: CR2032)
 Approximately 10 years on type CR2032 (assuming alarm operation 10 sec./day and one illumination operation 1.5 sec./day)

Frequent illumination shortens the battery life.

Specifications are subject to change without notice.

EN-50

EN-51



L-1

Site Data List

Site	UTC Differential		Longitude
	Standard Time	DST/Summer Time	
ABIDJAN	+0.0	+1.0	4°W
ABU DHABI	+4.0	+5.0	54°E
ADDIS ABABA	+3.0	+4.0	39°E
ADEN	+3.0	+4.0	45°E
AMSTERDAM	+1.0	+2.0	5°E
ANCHORAGE	-9.0	-8.0	149°W
ATHENS	+2.0	+3.0	24°E
AZORES	-1.0	+0.0	25°W
BANGKOK	+7.0	+8.0	101°E
BEIJING	+8.0	+9.0	116°E
BEIRUT	+2.0	+3.0	36°E

L-2

Site	UTC Differential		Longitude
	Standard Time	DST/Summer Time	
BOGOTA	-5.0	-4.0	74°W
BOSTON	-5.0	-4.0	71°W
BRASILIA	-3.0	-2.0	48°W
BUENOS AIRES	-3.0	-2.0	58°W
CAPE TOWN	+2.0	+3.0	18°E
CARACAS	-4.0	-3.0	67°W
CASABLANCA	+0.0	+1.0	8°W
CHICAGO	-6.0	-5.0	88°W
CHRISTCHURCH	+12.0	+13.0	173°E
DAKAR	+0.0	+1.0	17°W
DALLAS FORT WORTH	-6.0	-5.0	97°W
DAMASCUS	+2.0	+3.0	36°E

L-3

Site	UTC Differential		Longitude
	Standard Time	DST/Summer Time	
DENVER	-7.0	-6.0	105°W
DETROIT	-5.0	-4.0	83°W
DHAKA	+6.0	+7.0	90°E
DUBAI	+4.0	+5.0	55°E
DUBLIN	+0.0	+1.0	6°W
EDMONTON	-7.0	-6.0	114°W
EL PASO	-7.0	-6.0	106°W
FRANKFURT	+1.0	+2.0	9°E
GOLD COAST	+10.0	+11.0	154°E
GUAM	+10.0	+11.0	145°E
HAMBURG	+1.0	+2.0	10°E
HANOI	+7.0	+8.0	106°E

L-4

Site	UTC Differential		Longitude
	Standard Time	DST/Summer Time	
HELSINKI	+2.0	+3.0	25°E
HONG KONG	+8.0	+9.0	114°E
HONOLULU	-10.0	-9.0	158°W
HOUSTON	-6.0	-5.0	95°W
ISTANBUL	+2.0	+3.0	29°E
JAKARTA	+7.0	+8.0	107°E
JEDDAH	+3.0	+4.0	39°E
KARACHI	+5.0	+6.0	67°E
KUALA LUMPUR	+8.0	+9.0	102°E
KUWAIT	+3.0	+4.0	48°E
LA PAZ	-4.0	-3.0	68°W
LAS VEGAS	-8.0	-7.0	115°W

L-5

Site	UTC Differential		Longitude
	Standard Time	DST/Summer Time	
LIMA	-5.0	-4.0	77°W
LISBON	+0.0	+1.0	9°W
LONDON	+0.0	+1.0	0°E
LOS ANGELES	-8.0	-7.0	118°W
MADRID	+1.0	+2.0	4°W
MANILA	+8.0	+9.0	121°E
MELBOURNE	+10.0	+11.0	145°E
MEXICO CITY	-6.0	-5.0	99°W
MIAMI	-5.0	-4.0	80°W
MILAN	+1.0	+2.0	9°E
MONTEVIDEO	-3.0	-2.0	56°W
MONTREAL	-5.0	-4.0	74°W

L-6

Site	UTC Differential		Longitude
	Standard Time	DST/Summer Time	
MUSCAT	+4.0	+5.0	59°E
NADI	+12.0	+13.0	177°E
NAIROBI	+3.0	+4.0	37°E
NAURU ISLAND	+12.0	+13.0	167°E
NEW ORLEANS	-6.0	-5.0	90°W
NEW YORK	-5.0	-4.0	74°W
NOME	-9.0	-8.0	165°W
NOUMEA	+11.0	+12.0	166°E
PAGO PAGO	-11.0	-10.0	171°W
PANAMA CITY	-5.0	-4.0	80°W
PAPEETE	-10.0	-9.0	150°W
PARIS	+1.0	+2.0	2°E

L-7

Operation Guide 3518

CASIO®

Site	UTC Differential		Longitude
	Standard Time	DST/ Summer Time	
PERTH	+8.0	+9.0	116°E
PHNOM PENH	+7.0	+8.0	105°E
PORT OF SPAIN	-4.0	-3.0	62°W
PORT VILA	+11.0	+12.0	168°E
PRAIA	-1.0	+0.0	24°W
PYONGYANG	+9.0	+10.0	126°E
RIYADH	+3.0	+4.0	47°E
ROME	+1.0	+2.0	13°E
SAN FRANCISCO	-8.0	-7.0	122°W
SANTIAGO	-4.0	-3.0	71°W
SAO PAULO	-3.0	-2.0	47°W
SEATTLE	-8.0	-7.0	122°W

L-8

Site	UTC Differential		Longitude
	Standard Time	DST/ Summer Time	
SEOUL	+9.0	+10.0	127°E
SHANGHAI	+8.0	+9.0	121°E
SINGAPORE	+8.0	+9.0	104°E
STOCKHOLM	+1.0	+2.0	18°E
SYDNEY	+10.0	+11.0	151°E
TAIPEI	+8.0	+9.0	121°E
TOKYO	+9.0	+10.0	140°E
ULAANBAATAR	+8.0	+9.0	107°E
VANCOUVER	-8.0	-7.0	123°W
VIENNA	+1.0	+2.0	16°E
VIENTIANE	+7.0	+8.0	103°E
WELLINGTON	+12.0	+13.0	175°E

L-9

Site	UTC Differential		Longitude
	Standard Time	DST/ Summer Time	
WINNIPEG	-6.0	-5.0	97°W

- The contents of the above table are current as of January 2022.
- The rules governing global times (UTC offset and GMT differential) and summer time are determined by each individual country.

L-10